

# THIS IS NOT AN REV CONTROLLED ENGINEERING PRINT

ATM

VACUUM

ENVIRONMENTAL CONDITIONS

TEMP -40°F TO +225°F  
 PRESSURE  
 VACUUM  
 CHEMICALS  
 OTHER

QC TESTING


VACUUM LEAK @  
 PRESSURE LEAK @ 100PSI  
 ELECTRICAL HIPOT@ 1000VAC

HOUSING SPECIFICATIONS

HSG P/N 26539-1  
 THREAD 1/2" NPT  
 MAT'L STEEL PLATING  
 TYPE BULLET HUB

LEAD WIRE/CONNECTOR DATA

CONTAINS:  
 (6) #24AWG 1000V TEFLON  
 P/N 1996-24-0

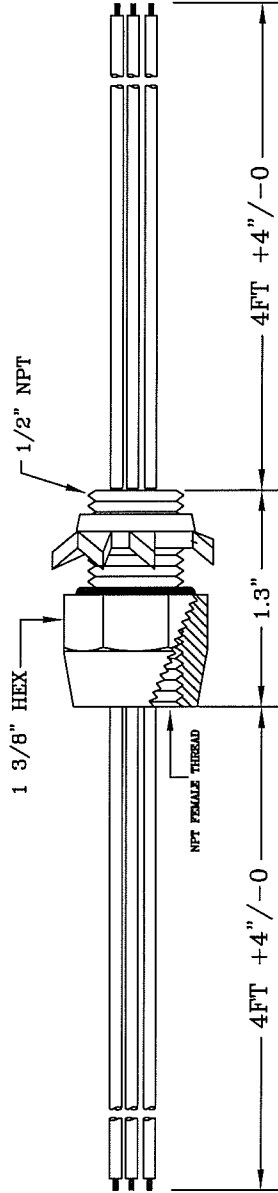

- NOTES:
1. NOT ALL WIRES SHOWN.
  2. MARK AND TAG ALL WIRES END TO END
  3. NO EPOXY ON INTERNAL THREADS

UNLESS NOTED: All Dimensions In Inches, Remove All Burrs, Break All Sharp Edges, Tolerances: .XX ±.01, .XXX ±.005

DOUGLAS ELECTRICAL COMPONENTS



14 Beach Street, Rockaway, NJ 07866  
 PH: 973-627-8230 FX: 973-627-5798

REV	ECN#	APP'D	DATE	TITLE
				1/2" NPT BULLET HUB FEEDTHRU
				Drawn RSM
				Date 9/9/05
				App'd
				Date
				Dwg No 28214/4/4
				Rev. OR

SCALE: NTS

Ref.

SHEET 1 OF 1